75 cm, TRIMODE - GRAN MAESTRO INDOOR, Model BUILT-IN



UNDERCOUNTER® SERIE



FEATURES

- Made in Italy.
- Aisi 304 stainless steel body.
- Stainless steel interior finish
- Antibacterial stainless steel interior.
- Optiview: multi LED light array (top and side interior) provides brilliant illumination to the entire interior.
- Soft close door and drawers in all compartments
- TFT smarth display full color
- Acoustic and visual signals
- Total no frost 100% automatic system
- Isulated variavle speed compressors manteins precision temperature control with low vibration.
- Sabbath mode
- Front and rear adjustable feet up to 25 mm.
- Trimode ystem: Fhiaba patented Trimode drawers con be set to 3 different micrclimates: freezer, fresco or fridge.
- Avaible size: 24", 30", 36".
- Chill to serve: you can rapidly lower the temperature to 2°C before serving.
- Fully integrated / custom panel ready
- Fully extractable drawers with soft closing guides
- Aisi 304 stainless steel interior
- Low vibration compressor
- Full range of models and configurations. Can easily be combined and configured with other Fhiaba fridge, freezer, wine cellar models to fit your kitchen needs.


GENERAL PROPERTIES	
Reversible door	NO NO
Equilance	NO
SoftClosing Runner	YES
ow vibration	YES
ptieview (LED light spots)	YES
helves	
Slide-out shelves	
ype of shelves	
Door Bins	
ridge drawers type	
resco/LowTemp Drawers	
ottom drawers	2
ıll Extension shelves 90° door opening	NO
ull Extension drawers 90° door opening	YES
efrost Process	AUTOMATIC
e maker with water filter	NO
Ooor Open Alarms	YES
lumidity control	NO NO
active carbon filter	NO
ir filter control	NO NO
hopping Fridge	NO NO
hopping Freezer	YES
ower Failure Function	YES

75 cm, TRIMODE - GRAN MAESTRO INDOOR, Model


BUILT-IN

UNDERCOUNTER® SERIE

PRODUCT DETAIL







2BD | 1M

BD = drawerM = separate microclimates

Fhaha

CAPACITY	
Volume Compartment 1 (L)	
Volume Compartment 2 (L)	
Volume Compartment 3 (L)	
Total Net Volume (L)	
Total Gross Volume (L)	
Compartment 1 / Upper wine cellar	
capacity (bottles)	
Compartment 2 / Lower wine cellar	
capacity (bottles)	
Undercounter glass shelf capacity (cans)	
Undercounter drawer capacity (cans)	
Undercounter bottom wooden bottle	
holder (bottles)	


TECHNICAL DETAILS	
Absorbed power (W)	
Total absorbed current (A)	2
Voltage (V)	220-240V
Frequency (Hz)	50-60 Hz
Power Cord Length (mm)	2
Plug Type	Schuko 16A
Climatic class	SN/T
Noise level (dB)	
Refrigerant (gas)	R600a
Water connection / female attachment	


EFFICIENCY	
New Energy Label class	
Energy consumption (kWh/year)	
DIMENSIONS & WEIGHT	
Height of the product (closed weels) (mm)	865
Adjustable feet height (mm)	25
Width of the product (mm)	748
Depth of Product without handle (mm)	572
Wall cavity height (mm)	870
Wall cavity width (mm)	750
Wall cavity depth (mm)	600
Net Weight (kg)	69
Gross Weight (kg)	84
TEMPERATURE RANGES	
Climatic compartments	1
Compartment 1 / Upper temperature (°C)	
Compartment 2 / Middle temperature (°C)	
Low temp zone	NO
Compartment 3 / Low temperature (°C)	from -15 to -22
Dual zone	NO NO

75 cm, TRIMODE - GRAN MAESTRO INDOOR, Model BUILT-IN




PRODUCT SPECIFICATIONS AND DIMENSIONS

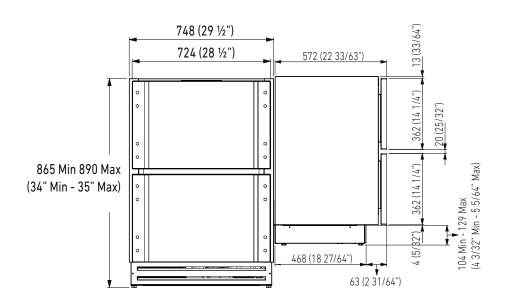



Filaba

Electrical and Water connection





For installation specifications, please consult with Fhiaba. For optimum installation, we recommend using the actual product as the best guide.




Based on the adjustment of the feet and the height of the panel from the floor, the customer defines the perforated plinth to be installed on the equipment.

75 cm, TRIMODE - GRAN MAESTRO INDOOR, Model

BUILT-IN


UNDERCOUNTER® SERIE

NICHE SPECIFICATIONS AND DIMENSIONS

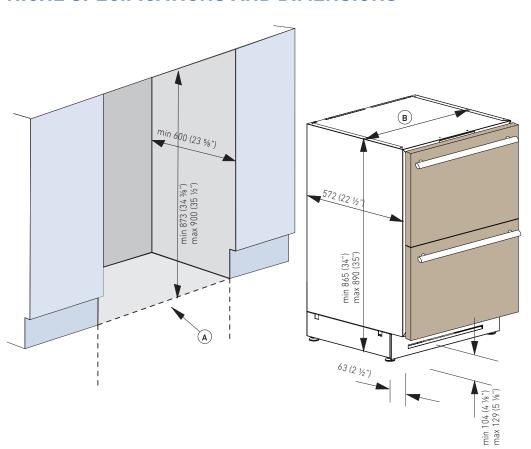

TECHNICAL DATA	
Niche Width A (mm)	750
Unit Width B (mm)	748

Panel Dimensions

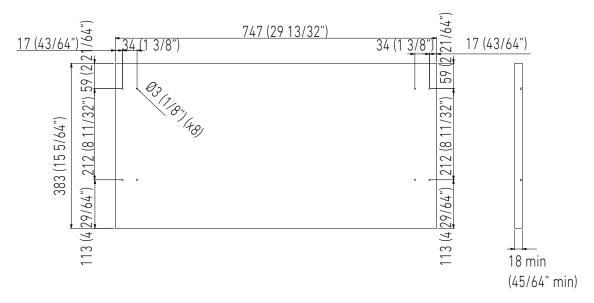



Integrated Panel Recommendations

Panels with thickness ranging between 18 mm and mm. Panels with weight max of 10 kg. Provide installation of decorative panels during installation of the unit.

Fhaha

75 cm, TRIMODE - GRAN MAESTRO INDOOR, Model BUILT-IN



UNDERCOUNTER® SERIE

INSTALLATION INFORMATION

ACCESSORIES

- Stainless steel tubolar handless 30mm
- Stainless steel tubolar handless 18mm
- Stainless steel panels
- Extra lenght anti-tipping kit
- Cleaning kit
- FLD Fhiaba Link Device



For installation specifications, please consult with Fhiaba. For optimum installation, we recommend using the actual product as the best guide.

