# 60 cm, TRIMODE - PREMIUM OUTDOOR, Model BUILT-IN



**UNDERCOUNTER® SERIE** 



#### **FEATURES**

- Made in Italy.
- Aisi 304 stainless steel body.
- Stainless steel interior finish
- Antibacterial stainless steel interior.
- Optiview: multi LED light array (top and side interior) provides brilliant illumination to the entire interior.
- Soft close door and drawers in all compartments
- Smart OLED display
- Acoustic and visual signals
- Total no frost 100% automatic system
- Isulated variavle speed compressors manteins precision temperature control with low vibration.
- Sabbath mode
- Front and rear adjustable feet up to 25 mm.
- Trimode ystem: Fhiaba patented Trimode drawers con be set to 3 different micrclimates: freezer, fresco or fridge.
- Avaible size: 24", 30", 36".
- Chill to serve: you can rapidly lower the temperature to 2°C before serving.
- Built-in / Stainless steel front and handle
- Fully extractable drawers with soft closing guides
- Aisi 304 stainless steel interior
- Low vibration compressor
- Full range of models and configurations. Can easily be combined and configured with other Fhiaba fridge, freezer, wine cellar models to fit your kitchen needs.

GENERAL PROPERTIES	
Reversible door	NO
Equilance	NO
SoftClosing Runner	YES
Low vibration	YES
Optieview (LED light spots)	YES
Shelves	
Slide-out shelves	
Type of shelves	
Door Bins	
Fridge drawers type	
Fresco/LowTemp Drawers	
Bottom drawers	2
Full Extension shelves 90° door opening	NO
Full Extension drawers 90° door opening	YES
Defrost Process	AUTOMATIC
Ice maker with water filter	NO NO
Door Open Alarms	YES
Humidity control	NO NO
Active carbon filter	NO
Air filter control	NO NO
Shopping Fridge	NO NO
Shopping Freezer	YES
Power Failure Function	YES

60 cm, TRIMODE - PREMIUM OUTDOOR, Model



**UNDERCOUNTER® SERIE** 

### **PRODUCT DETAIL**







2BD | 1M

**BD** = drawer **M** = separate microclimates


TECHNICAL DETAILS	
Absorbed power (W)	
Total absorbed current (A)	2
Voltage (V)	220-240V
Frequency (Hz)	50-60 Hz
Power Cord Length (mm)	2
Plug Type	Schuko 16A
Climatic class	SN/T
Noise level (dB)	
Refrigerant (gas)	R600a
Water connection / female attachment	


EFFICIENCY	
New Energy Label class	
Energy consumption (kWh/year)	
DIMENSIONS & WEIGHT	
Height of the product (closed weels) (mm)	865
Adjustable feet height (mm)	25
Width of the product (mm)	598
Depth of Product without handle (mm)	576
Wall cavity height (mm)	870
Wall cavity width (mm)	600
Wall cavity depth (mm)	600
Net Weight (kg)	66
Gross Weight (kg)	81
TEMPERATURE RANGES	
Climatic compartments	1
Compartment 1 / Upper temperature (°C)	
Compartment 2 / Middle temperature (°C)	
Low temp zone	NO NO
Compartment 3 / Low temperature (°C)	from 8 to -22
Dual zone	NO NO

60 cm, TRIMODE - PREMIUM OUTDOOR, Model BUILT-IN




### PRODUCT SPECIFICATIONS AND DIMENSIONS

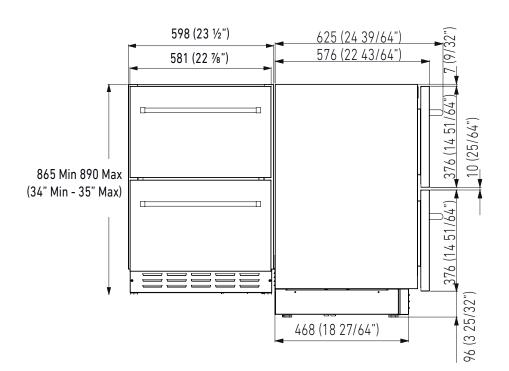



Fhaha

#### **Electrical and Water connection**





For installation specifications, please consult with Fhiaba. For optimum installation, we recommend using the actual product as the best guide.




Based on the adjustment of the feet and the height of the panel from the floor, the customer defines the perforated plinth to be installed on the equipment.

60 cm, TRIMODE - PREMIUM OUTDOOR, Model

**BUILT-IN** 

**UNDERCOUNTER® SERIE** 

### **NICHE SPECIFICATIONS AND DIMENSIONS**

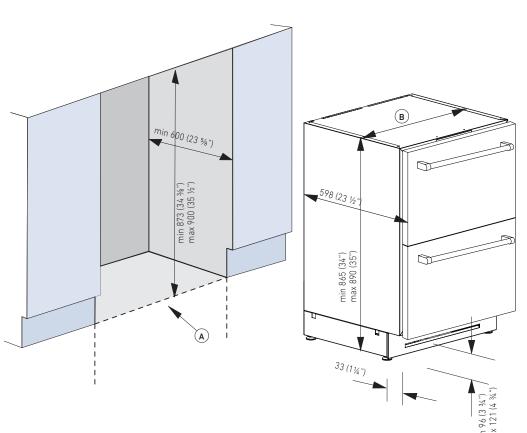

TECHNICAL DATA	
Niche Width <b>A</b> (mm)	600
Unit Width <b>B</b> (mm)	598

### **Panel Dimensions**



#### **Integrated Panel Recommendations**

Panels with thickness ranging between 18 mm and mm.

Panels with weight max of 8 kg. Provide installation of decorative panels during installation of the unit.

Fhaba

60 cm, TRIMODE - PREMIUM OUTDOOR, Model BUILT-IN



### **INSTALLATION INFORMATION**



#### **ACCESSORIES**

- Stainless steel tubolar handless 30mm
- Stainless steel tubolar handless 18mm
- Extra lenght anti-tipping kit
- Cleaning kit
- FLD Fhiaba Link Device
- Painting
- 90° Door stop



For installation specifications, please consult with Fhiaba. For optimum installation, we recommend using the actual product as the best guide.

